

Industrial Hose



An ISO 9001 Co.

HYDRAULIC HOSES & FITTINGS



SONI RUBBER PRODUCTS LTD.



Managing Director



About Us...

SONI Group was setup in 1966 and from the day of inception the enterprise started dealing in various types of hoses and hose assemblies which include Hydraulic, Pneumatic, Rockdrill etc. and within a short span of time started their own assembly plant to manufacture hydraulic hose assemblies with wire braided and spiral wire reinforced super high pressure hoses.

Offlate the management decided to manufacture Hydraulic Hoses and the founder members of the group Late A.S. Soni, Mr. Tajindar Singh, Mr. J.S. Soni started visiting renowned hose manufacturers in the world for search of excellence in hose manufacturing & finally in the year 1981 production of Wire Braided Hoses started and late in a very short period the product was established and accepted in the market as well as by the reputed Engineering Industries.

In 1983 'SONI' launched Spiral Wire Reinforced Super High Pressure Hoses for the first time in the country as on date and have been able to provide a total import substitution in case of Spiral hoses.

Soni has got the complete in-house facility of manufacturing both hoses and end fittings. This unique feature has enabled "SONI" to become the market leader of the finished product.

"SONI" is playing one of the most important role in Indian Hose Industries and will always be ahead in providing solutions related to any problem of Hydraulic Hose Applications.

"SONI" has got ex-stock availability of hoses and end fittings which enable "SONI" to despatch the ordered goods within 24 hours.

The Organisation has also taken up modernisation programme for further technological development in the field of hoses and has also diversified their activities regarding manufacture of Moulded rubber products which include Push on Rubber, Gaskets, Dump Body Pads of HEMMs, Rubberized Fabrics, Battery Containers.

In brief SONI Group is committed to maintain quality standards to an optimum level and also to offer an unbeatable price along with superior after sales service through Nation wide network of their Branch Offices and distributors, to remain in the forefront of Indian Hose Industry.



CONTENTS

1. Industrial Hose.....	1 – 6
Soni Car Wash Hose Exceeds IS 444 Type - 3 B (Wire Braid) ----	1
Soni Tractor Trolley Hose (Single Wire Braid) ----	1
Soni Air / Water Hose Exceeds IS 444 Type - 1 / Type - 2 ----	1
Soni Heavy Duty Pneumatic Tool Hose Exceeds IS 446 Type - 2 (Wire Braid) ----	2
Soni Automotive A. C. Hose SAE J 2064 Type A (Single Braid) ----	2
Soni Tractor Trolley Hose (Double Wire Braid) ----	2
Soni Automotive A. C. Hose SAE J 2064 Type A (Double Braid) ----	3
Soni Single Wire Braid Air Drill Hose ----	3
Soni 2 Wire Braid Air Drill Hose ----	3
Soni Pneumatic Tool Hose Exceeds IS 446 Type - 2 ----	4
Soni Braided Rock Drill Hoses ----	4
Soni Chemical Hose Exceeds IS 7654 Type - 2 ----	4
Soni Chemical Hose with UHMWPE ----	5
Soni Welding Hose Exceeds IS 447 ----	5
Soni Jack Hose 10,000 PSI Working Pressure ----	5
Soni Carbon Free Hose ----	6
Soni Sand / Shot Blast Hose, Exceeds IS 5894 Type - 2 (Textile Braid) ----	6
2. Drop in Pressure During Hydraulic Operation.....	7
3. Salient Features	7
4. Decimal And Millimeter Equivalents of Fractions	8
5. Metric (SI) - U.S. Units for Fluid Power Hoses	8
6. Selection of Hose & Fittings	9
7. End Fittings Standards	11
8. Correct Assembly Installation	
9. Fittings	

The benefits of purchasing **SONI** hoses and hose assemblies

1. '**SONI**' is the only manufacturer of hoses as well as hose assemblies

- i) '**SONI**' is the only manufacturer to offer entire range of hydraulic and pneumatic hoses from 3/16" ID to 5" ID. Pressures rating from low, medium, high and super high pressure.
- ii) End fittings are manufactured and assembled under one roof.
- iii) The benefit of having a hose manufacturer who is also the end fitting manufacturer is the minimization of cost and delay in various forms.
- iv) This also enables '**SONI**' to offer prices and delivery schedule which none can match in the industry.
- v) This compatibility pays off in maintaining better quality and production schedules as the entire setup and control is under one roof.

2. Quality Product

- i) At '**SONI**' we believe that when the input & process is of top quality then the output has to be of unquestionable quality. The basic raw material rubber is imported from world class manufacturers Du Pont (USA), Bayer (Germany). The high tensile carbon steel wire imported from Bekaert (Belgium). The chemicals from ICI, PIL, Bayer and the carbon black from Philips.
- ii) The process machinery from the best in the world. The braiders & Spiralling machine from TMW/ Rockwell (USA). The boilers from Thermax and rubber mixing machinery from Santosh, (Bombay), Iddon (U.K.).

3. 50 years Experience

- i) '**SONI**' is in the field of Hydraulic Hoses and Hose Assemblies for the last 50 years. This vast experience gained over the years by '**SONI**' has resulted in extensive know how that is guaranteed to help solve any problem.
- ii) '**SONI**'s products are used in nearly all the major industries i.e. earth moving, steel and allied

industries as well as various original equipment manufacturers thereby providing '**SONI**' with a wide spectrum of clients which help '**SONI**' in the better understanding of the working of hydraulic systems and their limitations and capabilities.

4. Ex-Stock Delivery

- i) Soni's huge inventory of 45,000 mtrs. of bare hose and 3,50,000 end fittings enables '**SONI**' to make deliveries within the same day of call.
- ii) All those are just a fax, email or telephone call away.

5. Pioneering efforts in R & D

- i) In 1984 we pioneered the production of Super high pressure spiral hoses in India and in 1996 we are still the pioneer and leader in the said field.
- ii) The only manufacturer to manufacture 5" ID wire braided hoses.

6. Comprehensive in-house Testing facilities

- i) '**SONI**'s commitment to quality is firm and as a result of this we have a most modern and sophisticated laboratory, which includes the following :
 - Rheometric test on the Monsanto Rheometer MDR 2000.
 - Tensile test, Elongation, Hardness, Oil Swelling, Ageing etc.
 - Hydrostatic proof pressure test
 - Change in length test
 - Burst pressure test
 - Impulse test
 - Ozone test
 - Cold leend test
 - Oil resistanceted

7. Competitive pricing

'**SONI**' is one the of the largest manufacturers of hydraulic hoses and hose assemblies in the country and also manufacturing hoses and hose assemblies under one roof enabling '**SONI**' to offer price and delivery schedule which none can match in the industry.

**Serving Industries
for more than
50 years**


PLANT & MACHINERY



Hose Life Test-impulse Pressure Testing




Rheometer

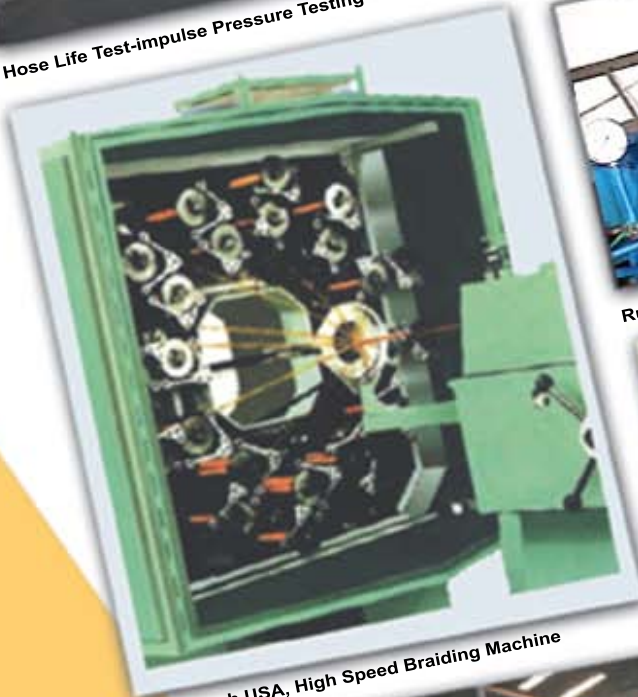


Magnatech USA, High Speed Braiding Machine




Rubber Tensile & Simulated Ageing

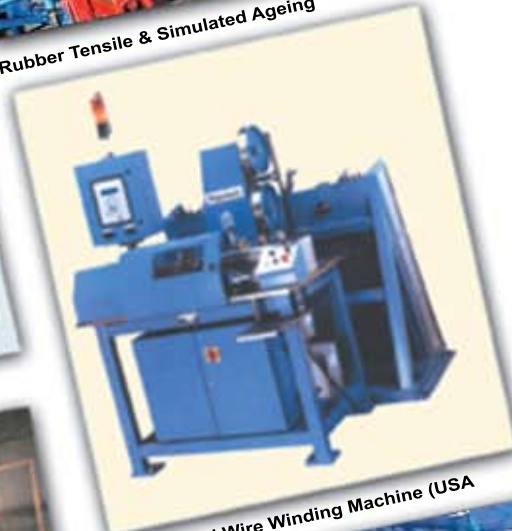

High Speed Wire Winding Machine (USA)

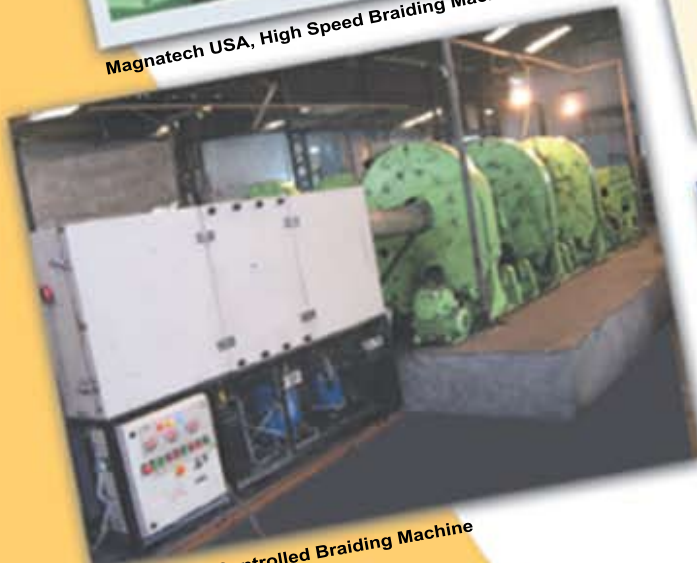

Temperature Controlled Braiding Machine

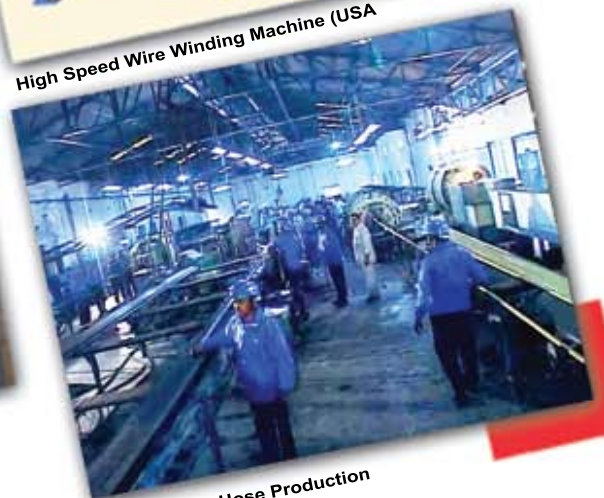


Long Length Hose Production

PLANT & MACHINERY



HOSE MANUFACTURING

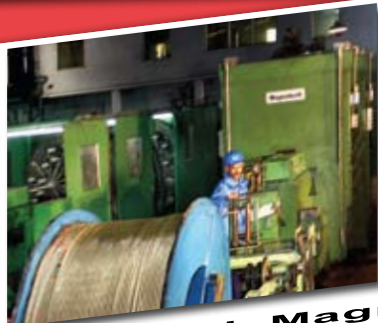

High Speed Magnatech Braiders

HOSE ASSEMBLIES MACHINE



Computerised Impact Making Machine



CNC Turning Centers



Digital Finn-Power Crimping Machine

QUALITY TESTING MACHINE



Impulse Testing Machine



Cold Bend Test Chamber



Ozone Testing Chamber

Soni Hoses are manufactured conforming to standard **SAE, DIN, IS** and **EN** specification and are guaranteed against manufacturing defects. Soni Hoses are subject to the following tests :

- Dimensional check test
- Proof test
- Charge in length test
- Burst test
- Leakage test
- Oil Resistance test
- Visual examination.

Soni manufactures both Hoses and Fittings. This hydraulic compatibility pays off in improved efficiency and performance of the hydraulic system. For BCS-174 Hoses following tests are also conducted

- Fire resistance Test
- Antistatic Test.



Range of European Crimping Machine to crimp upto 5" I.D.

SONI CAR WASH HOSE EXCEEDS IS 444 TYPE - 3 B (WIRE BRAID)**Specification** : Exceeds IS 444 Type - 3 B**Application** : Suitable for automobile in service station for water application

Lining : Modified natural & synthetic blends of rubber compound

Reinforcement : Single steel wire braid

Cover : Oil resistant synthetic rubber with excellent abrasion & ozone resistant

Temperature : Service Temperature Range – 30°C to +80°C

NOMINAL BORE		MEAN OUTER COVER DIAMETER	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE	
Inch	mm	mm	Psi	Bar	Psi	Bar
3/8"	10.00	21.00	1080	75	4320	300
1/2"	12.50	24.00	1080	75	4320	300

SONI TRACTOR TROLLEY HOSE (SINGLE WIRE BRAID)**Application** : For High Pressure Application in Tractor Trolley

Lining : Oil Resistant Synthetic Rubber Compound

Reinforcement : Single Steel Wire Braid

Cover : Oil, Weather & Abrasion Resistant Synthetic Rubber Compound

Temperature : – 40°C To +80°C

NOMINAL BORE		MEAN OUTER COVER DIAMETER	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE	
Inch	mm	mm	Psi	Bar	Psi	Bar
3/8"	9.50	17.40	2500	172	10000	690
1/2"	12.7	20.60	2000	138	8000	552

SONI AIR/WATER HOSE EXCEEDS IS 444 TYPE - 1 / TYPE - 2**Specification** : Exceeds IS 444 Type -1 / Type - 2**Application** : General purpose air & water application in construction, Engineering, irrigation & Etc.

Lining : Modified Natural & Synthetic Blends of Rubber Compound

Reinforcement : Single / Double braid of high tenacity textile yarn

Cover : Modified natural & synthetic blends of rubber compound with excellent ageing and abrasion resistance.

Temperature : Service Temperature Range – 30°C to +80°C

NOMINAL BORE		MEAN OUTER COVER DIAMETER	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE	
Inch	mm	mm	Psi	Bar	Psi	Bar
1/4"	6.30	13.50	175	12	700	48
5/16"	8.00	15.50	175	12	700	48
3/8"	10.00	18.50	175	12	700	48
1/2"	12.50	20.50	175	12	700	48
5/8"	16.00	24.50	175	12	700	48
*3/4"	20.00	28.50	175	12	700	48
1"	25.00	34.50	175	12	700	48
1-1/4"	31.50	42.00	145	10	580	40
1-1/2"	38.00	50.50	145	10	580	40
2"	50.00	66.50	145	10	580	40

*BIS Marked Hosed Part No.

**SONI HEAVY DUTY PNEUMATIC TOOL HOSE EXCEEDS IS 446 TYPE - 2 (WIRE BRAID)**

Specification : Exceeds IS 446-Type - 2

Application : Recommended for all Types of Pneumatic Tools Industries for Compressed Air Application

Lining : Modified Natural & Synthetic Blends of Rubber Compound

Reinforcement : Single wire braid

Cover : modified natural & synthetic blends of rubber compound with excellent ageing and abrasion resistant

Temperature : Service Temperature Range –30°C to +80°C

NOMINAL BORE		MEAN OUTER COVER DIAMETER	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE	
Inch	mm	mm	Psi	Bar	Psi	Bar
1/4"	6.30	13.00	230	16	930	64
5/16"	8.00	15.50	230	16	930	64
1.1/4"	31.50	41.20	510	35	2040	140
1.1/2"	38.00	47.50	510	35	2040	140
2"	50.00	61.50	510	35	2040	140

**SONI AUTOMOTIVE A. C. HOSE SAE J 2064 TYPE A (SINGLE BRAID)**

Specification : Meets or exceeds SAE J 2064, TYPE A

Construction : Highly impermeable synthetic rubber tube, single high tensile synthetic yarns braid reinforcement and pin pricked outer cover with heat and ozone resistant synthetic elastomer

Application : Designed for application using refrigerant 134A only.

Temperature : – 40°C to +125°C (– 40°F to +257°F)

S.S. Ref. No.	HOSE SIZE		MAXIMUM WORKING PRESSURE	MINIMUM BURST PRESSURE	MINIMUM BEND RADIUS
	I.D.	O.D.			
	mm / in	mm / in			
S2064A-6	8.1	17.8	37	147	100.0
	0.320	0.70	537	2132	4.0
S2064A-8	10.6	22.2	37	147	115.0
	0.420	0.87	537	2132	4.5
S2064A-10	13.0	24.3	37	147	130.0
	0.510	0.96	537	2132	5.0
S2064A-12	14.5	23.4	37	147	150.0
	0.570	0.92	537	2132	6.0
S2064A-16	16.1	27.0	37	147	150.0
	0.640	1.060	537	2132	6.0

**SONI TRACTOR TROLLEY HOSE (DOUBLE WIRE BRAID)**

Application : For Medium pressure application in tractor trolley

Lining : Oil resistant synthetic rubber compound

Reinforcement : Double steel wire braid

Cover : Oil, weather & abrasion resistant synthetic rubber compound

Temperature : – 40°C to +80°C

NOMINAL BORE		MEAN OUTER COVER DIAMETER	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE	
Inch	mm	mm	Psi	Bar	Psi	Bar
3/8"	9.50	19.40	4000	276	16000	1103
1/2"	12.7	22.20	3500	241	14000	966


SONI AUTOMOTIVE A. C. HOSE SAE J 2064 TYPE A (DOUBLE BRAID)

Specification : Meets or exceeds SAE J 2064, TYPE A

Construction : Highly impermeable synthetic rubber tube, double high tensile synthetic yarns braid reinforcement and pin pricked outer cover with heat and ozone resistant synthetic elastomer.

Application : Designed for application using refrigerant 134A only.

Temperature : - 40°C to +125°C (-40°F to +257°F)

S.S. Ref. No.	HOSE SIZE		MAXIMUM WORKING PRESSURE Bar / Psi	MINIMUM BURST PRESSURE Bar / Psi	MINIMUM BEND RADIUS mm / in
	I.D.	O.D.			
	mm / in	mm / in			
D2064A-6	8.1	19.1	37	147	100.0
	0.320	0.750	537	2132	4.0
D2064A-8	10.6	23.0	37	147	115.0
	0.420	0.910	537	2132	4.5
D2064A-10	13.0	25.4	37	147	130.0
	0.510	1.000	537	2132	5.0
S2064A-11	11.1	23.0	37	147	140.0
	0.440	0.910	537	2132	5.5


SONI SINGLE WIRE BRAID AIRDRILL HOSE

Specification : Exceeds IS 446 - 1980 Type 3

Application : High Pressure Rock Drill and Pneumatic service in Drilling. Quarries, Construction and General industry.

Inner Tube : Heat and Oil mist resistant rubber.

Reinforcement : One high tensile steel wire braid.

Cover : Synthetic Rubber.

Temperature : Service Temperature Range -31°F to +212°F (-35°C to +100°C).

DASH NUMBER	HOSE I.D.		HOSE O.D.	WORKING PRESSURE		BULISTING PRESSURE	
	Inch	mm		Psi	Mpa	Psi	Mpa
-12	3/4	10.0	27.7	500	3.5	2000	14
-26	1	25.4	35.6	500	3.5	2000	14
-20	1-1/4	31.8	43.0	500	3.5	2000	14
-24	1-1/2	38.1	47.9	500	3.5	2000	14
-32	2	50.8	63.5	500	3.5	2000	14


SONI 2 WIRE BRAID AIRDRILL HOSE

Specification : Exceeds IS 446 - 1980 Type 3

Application : High Pressure Rock Drill and Pneumatic service in Drilling. Quarries, Construction and General industry.

Inner Tube : Heat and Oil mist resistant rubber.

Reinforcement : One high tensile steel wire braid.

Cover : Synthetic Rubber.

Temperature : Service Temperature Range -31°F to +212°F (-35°C to +100°C).

DASH NUMBER	HOSE I.D.		HOSE O.D.	WORKING PRESSURE
	Inch	mm		
-24	1-1/2	38.1	50.4	80



SONI PNEUMATIC TOOL HOSE EXCEEDS IS 446 TYPE - 2

Specification : Exceeds IS 446-Type - 2

Application : Recommended for all Types of Pneumatic Tools Industries for Compressed Air Application

Lining : Modified Natural & Synthetic Blends of Rubber Compound.

Reinforcement : Single / Double braid of high Tenacity Textile Yarn.

Cover : Modified Natural & Synthetic Blends of Rubber Compound with excellent Ageing and abrasion Resistance.

Temperature : Service Temperature Range -30°C to +80°C.

NOMINAL BORE		MEAN OUTER COVER DIAMETER	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE	
Inch	mm	mm	Psi	Bar	Psi	Bar
1/4"	6.30	13.00	230	16	930	64
5/16"	8.00	15.50	230	16	930	64
3/8"	10.00	18.50	230	16	930	64
1/2"	12.50	20.00	230	16	930	—
5/8"	16.00	24.5	230	16	930	64
3/4"	20.00	30.00	230	16	930	64
1"	25.00	35.00	230	16	930	64
1.1/4"	31.50	43.20	200	14	810	56
1.1/2"	38.00	50.00	200	14	810	56
2"	50.00	64.00	200	14	810	56

SONI BRAIDED ROCK DRILL HOSES

Specification : SONI IS 446 - 3

Application : Built to withstand extremely rough handling, this top quality hose is recommended for the most severe service conditions found in open cast mines and quarries. It can be used under conditions where normally only armoured hose would be practicable. It is ideal for use where the jagged, hard and abrasive materials, such as iron ore, granite, quartz or limestone would cut up other types of hoses.

Features : Designed to meet Indian Standard 911 -1993, this hose has a seamless, non-porous lining which is resistant to the action of vapour and heat. Braided construction, the hose is flexible as a rope and kink-proof. The cover permits it to glide over hard rock surfaces without snagging. It is available in long lengths, thereby eliminating the use of intermediate couplings. Recommended operating temperature range: -40°C to +70°C.

HOSE SIZE I.D.		APPROX. O.D.	BRAIDS	WORKING PRESSURE	
in	mm	mm		Psi	Kg/cm ²
1/2	12.7	23.5	2	203	14.3
3/4	19.0	29.8	2	203	14.3
1	25.4	38.2	2/3	203	14.3
1.1/4	31.8	44.6	2/3	203	14.3
1.1/2	38.1	50.9	2/3	203	14.3

SONI CHEMICAL HOSE EXCEEDS IS 7654 TYPE - 2

Specification : Exceeds IS 7654 Type - 2

Application : Designed for a wide range of chemicals, dilute acids, alkalies & alcoholic materials

Lining : EPDM rubber compound

Reinforcement : Double high tenacity synthetic yarn braids

Cover : EPDM rubber compound with heat, abrasion, ageing and ozone resistance

Temperature : Service Temperature Range -40°C to +100°C

NOMINAL BORE		MEAN OUTER COVER DIAMETER	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE	
Inch	mm	mm	Psi	Bar	Psi	Bar
3/8"	10.00	18.00	145	10	580	40
1/2"	12.50	22.50	145	10	580	40
5/8"	16.00	26.00	145	10	580	40
3/4"	20.00	30.00	145	10	580	40
1"	25.00	36.50	145	10	580	40
1.1/4"	31.50	43.20	145	10	580	40
1.1/2"	38.00	50.50	145	10	580	40
2"	50.00	66.50	145	10	580	40


SONI CHEMICAL HOSE WITH UHMWPE

Application : It handles the majority of common industrial chemicals in pressure, gravity flow and also in food and beverages industry.


Tube : Chemical resistance synthetic tube with UHMWPE film

Braiding : Double textile braid

Cover : Chemical resistance synthetic rubber

Temperature : Service Temperature Range -30°C to +80°C

NOMINAL BORE		MEAN OUTER COVER DIAMETER	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE	
Inch	mm	mm	Psi	Bar	Psi	Bar
1/2"	12.70	24.60	145	10	580	40
3/4"	19.10	29.30	145	10	580	40
1"	25.40	38.60	145	10	580	40
1.1/4"	31.75	45.90	145	10	580	40
1.1/2"	38.10	54.10	145	10	580	40
2"	50.80	68.30	145	10	580	40


SONI WELDING HOSE EXCEEDS IS 447

Specification : Exceeds IS 447

Application : For use in workshop

Construction : Uniform seamless inner tube with reinforcement of synthetic yarn and outer cover is cloth mark finish from tough abrasion resistant blue / red coloured rubber compound

NOMINAL BORE		MEAN OUTER COVER DIAMETER	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE	
Inch	mm	mm	Psi	Bar	Psi	Bar
5/16"	8.00	15.70	180	12	720	50
1/2"	12.50	21.20	180	12	720	50


SONI JACK HOSE 10,000 PSI WORKING PRESSURE

Construction : Tube : Synthetic Oil Resistant Rubber

Reinforcement : 2 High tensile steel wire braids

Cover : Synthetic Rubber - abrasion ozone and weather resistant

Application : Hydraulic Jack application used in jacking systems.

Temperature : - 40°C to +50°C.

HOSE SIZE						MAXIMUM WORKING PRESSURE		MINIMUM BURST RADIUS		MINIMUM BEND RADIUS	
Dash No.	DN	I.D.		R.O.D.	O.D.						
		in	mm	mm	mm						
1/4	6	1/4	6.4	12.7	14.8	10000	690	20000	1380	4.0	102
3/8	10	3/8	9.5	16.7	18.8	10000	690	20000	1380	5.0	107

* Recommended for Static (Non-impulse) pressure rating for hydraulic jacking applications only.



SONI CARBON FREE HOSE

Application : Recommended for specialised furnace coolant application in electrical steel industry and other non-conductive applications


Lining : White synthetic rubber compound

Reinforcement : Double high tenacity synthetic yarn braids

Cover : Green rubber compound with abrasion, ageing and ozone resistance

Temperature : Service Temperature Range -40°C to +100°C

NOMINAL BORE		MEAN OUTER COVER DIAMETER	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE	
Inch	mm	mm	Psi	Bar	Psi	Bar
3/8"	10.00	18.00	290	20	1160	80
1/2"	12.50	22.50	290	20	1160	80
5/8"	16.00	26.00	290	20	1160	80
3/4"	20.00	30.00	290	20	1160	80
1"	25.00	36.50	290	20	1160	80
1.1/4"	31.50	43.50	245	17	980	68
1.1/2"	38.00	50.50	245	17	980	68
2"	50.00	66.50	245	17	980	68



SONI SAND / SHOT BLAST HOSE, EXCEEDS IS 5894 TYPE - 2 (TEXTILE BRAID)

Specification : Exceeds IS 5894 Type - 2

Application : For cleaning / blasting, casting metal, stone, concrete surface with wet / dry sand or other abrasive material.

Lining : Extra thick seamless rubber lining free from mineral filler, with high resilience and abrasion resistance.

Reinforcement : Suitable braids with textile yarn and static wire.

Cover : Highly abrasion resistance rubber compound with excellent ozone and weather resistance.

Temperature : Service Temperature Range -40°C to +70°C

NOMINAL BORE		MEAN OUTER COVER DIAMETER	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE	
Inch	mm	mm	Psi	Bar	Psi	Bar
3/4"	20.00	39.00	175	12	870	60
1"	25.40	45.00	175	12	870	60
1.1/4"	31.80	52.30	175	12	870	60
1.1/2"	38.10	58.50	175	12	870	60
2"	50.00	71.0	175	12	870	60



DROP IN PRESSURE DURING HYDRAULIC OPERATION


Pressure drop or decrease in outlet/end pressure signifies the difference between the pressure of a hydraulic fluid when it enters through a hydraulic hose assembly and at the point it leaves the assembly through the other end-which might be lesser due to various reasons as follows :

FRICTION	: It generates as the fluid moves with contact upon/against the inside walls of the hose assembly.
NATURE OF FLUID	: Behaviour under pressure differs with the fluid type. Thicker fluids generate more friction and may cause greater pressure drop.
TEMPERATURE OF THE FLUID	: Fluids turn thinner with the increase of the temperature resulting a smoother movement.
LENGTH OF THE HOSE ASSEMBLY	: The length of the hose assy, is inversely proportional with the pressure i.e. the longer surface consists of more area of friction, hence responsible for greater pressure drop.
INTERNAL DIAMETER (I.D.) OF THE HOSE	: At a constant flow rate, decrease-in-hose ID affects the velocity of fluids. As the higher velocity produces a considerable decrease in pressure, so a large ID hose would be helpful for less pressure drop.
DESIGN OF ADAPTOR & COUPLINGS	: Change in orientation and/or bore design (like in 45°, 90° elbows etc.) may result in higher pressure drop.
FLOW RATE	: Variation in flow rates affect the pressure negatively in same size (ID & Length) hose.



SALIENT FEATURES

- ◆ Only Hose manufacturer in India having in-house facility to manufacture both Hoses and End Fittings.
- ◆ Latest Manufacturing Technology and Process Control.
- ◆ Hose manufacturer approved by DGMS - Underground Mining ATEX certified CE Marked Petroleum Gasoline Hoses.
- ◆ Wide network and distribution Centers having offices in the Major Metro Cities to provide speedy delivery and superior after sales services.
- ◆ Approved supplier to Indian Railways, EIL, BHEL, MECON, ONGC, Coal India Ltd. and various Original Equipment Manufacturers.
- ◆ One of the largest Installed Capacity to Manufacture Hydraulic Hoses in India of 2 Million Mtrs. per annum.
- ◆ India's first Hose manufacturer to manufacture SUPER HIGH PRESSURE MULTI SPIRAL HOSES rated up to 6000 PSI conforming to SAE and DIN standards.
- ◆ Only manufacturer to produce Wire Braided Hoses upto 4" ID and provide crimped assemblies.
- ◆ Only manufacturer to offer hoses and hose assemblies under one roof resulting in lower costs and better quality.

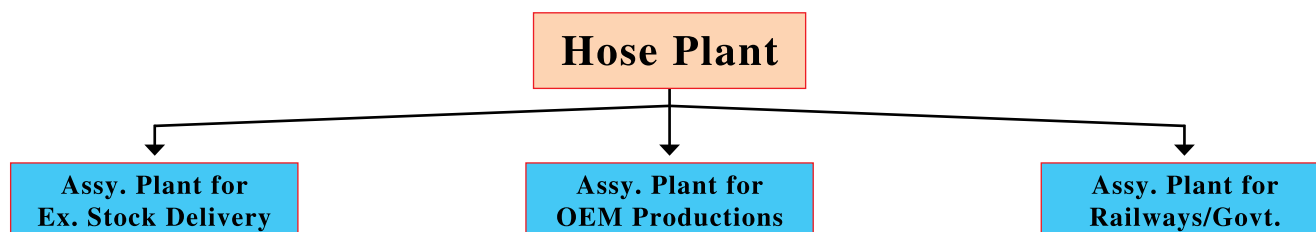

Raw material procured from the best in the world. Rubber from Dehra. Reinforcement wire from Bekaert, Belgium. Chemicals from Bayer and ICI.

Worlds most renowned machinery. Rockwell Spiral Winder (USA). Braiders from Magnatech (USA).

Modern and well equipped Laboratory including the latest Rheometer MDR 2000 Ozone, Cold Chamber, Abrasion.

Hose & Assemblies validation through Life Test on Impulse Pressure Test Machine.

Hose Plant built over a land area of 1,72,000 sq. ft with built up area of 75,000 sq.ft.



DECIMAL AND MILLIMETER EQUIVALENTS OF FRACTIONS

Inches		
Fractions	Decimals	Millimeters
1/64	.015625	.397
1/32	.03125	.794
3/64	.046875	1.191
1/16	.0625	1.588
5/64	.078125	1.984
3/32	.09375	2.381
7/64	.109375	2.778
1/8	.125	3.175
9/64	.140625	3.572
5/32	.15625	3.969
11/64	.171875	4.366
3/16	.1875	4.763
13/64	.203125	5.159
7/32	.21875	5.556
15/64	.234375	5.953
1/4	.250	6.350
17/64	.265625	6.747
9/32	.28125	7.144
19/64	.296875	7.541
5/16	.3125	7.938
21/64	.328125	8.334
11/32	.34375	8.731

Inches		
Fractions	Decimals	Millimeters
23/64	.359375	9.128
3/8	.375	9.525
25/64	.390625	9.922
13/32	.40625	10.319
27/64	.421875	10.716
7/16	.4375	11.113
29/64	.453125	11.509
15/32	.46875	11.906
31/64	.484375	12.303
1/2	.500	12.700
33/64	.515625	13.097
17/32	.53125	13.494
35/64	.546875	13.891
9/16	.5625	14.288
37/64	.578125	14.684
19/32	.59375	15.081
39/64	.609375	15.478
5/8	.625	15.875
41/64	.640625	16.272
21/32	.65625	16.669
43/64	.671875	17.06

Inches		
Fractions	Decimals	Millimeters
11/16	.6875	17.463
45/64	.703125	17.859
23/32	.71875	18.256
47/64	.734375	18.653
3/4	.750	19.050
49/64	.765625	19.447
25/32	.78125	19.844
51/64	.796875	20.241
13/16	.8125	20.638
53/64	.828125	21.034
27/32	.84375	21.431
55/64	.859375	21.828
7/8	.875	22.225
57/64	.890625	22.622
29/32	.90625	23.019
59/64	.921875	23.416
15/16	.9375	23.813
61/64	.953125	24.209
31/32	.96875	24.606
63/64	.984375	25.003
1	1.000	25.400



METRIC (SI) - U.S. UNITS FOR FLUID POWER HOSES

The following conversions are based on information taken from ASTM
(American Society for Testing and Materials) Handbook E380-72.)

Quantity	Customary U.S. Unit	SI Unit	Conversion From U.S. to SI Units	Conversion SI to U.S. Units
Area	Square Inch (in ²)	Square Metre (m ²)	(in ²) x (6.4516 x 10 ⁻⁴) = (m ²)	(m ²) x 1550.003 = (in ²)
Force	Pound (lb _f)	Newton (N)	(lb _f) x 4.4482 = (N)	(N) x (2.2481 x 10 ⁻¹) = (lb _f)
Frequency	Cycles/Second (cps)	Hertz (Hz)	1 (cps) = 1 (Hz)	1 (Hz) = 1 (cps)
Length	Inch (in)	Metre (m)	(in) x (2.540 x 10 ⁻²) = (m)	(m) x 39.370 = (in)
Mass	Pound (lb _m)	Kilogram (kg)	(lb _m) x 0.4536 = (kg)	(kg) x 2.2046 = (lb _m)
Power	Electric Horsepower (HP)	Watt (W)	(HP) x (7.460 x 10 ²) = (W)	(W) x (1.3405 x 10 ⁻³) = (HP)
Pressure	Pounds/Sq In (psi)	Newtons/Sq Metre (N/m ²)	(psi) x (6.8948 x 10 ³) = (N/m ²)	(N/m ²) x (1.4504 x 10 ⁻⁴) = (psi)
		(Non-Preferred Conversions)		
	(psi)	Mega Pascal (MPa)	(psi) x (6.8948 x 10 ⁻³) = (Mpa)	(Mpa) x 145 (psi)
	(psi)	Bar (Bar)	(psi) x (6.8948 x 10 ⁻²) = (Bar)	(Bar) x (1.4504 x 10 ¹) = (psi)
	(Bar)	(N/m ²)	(Bar) x 100,000 = (N/m ²)	(N/m ²) x (1.00 x 10 ⁻⁵) = (Bar)
Temperature	Degrees Fahrenheit (°F)	Degrees Celsius (°C)	(°F - 32) ÷ 1.8 = (°C)	(°C x 1.8) + 32 = (°F)
Torque	Pound-Inch (lb _f -in)	Newton-Metres (N-m)	(lb _f -in) x (1.1298 x 10 ⁻¹) = (N-m)	(N-m) x 8.8507 = (lb _f -in)
Volume	US Gallon (Gal)	Cubic Metre (m ³)	(Gal) x (3.7854 x 10 ⁻³) = (m ³)	(m ³) x (2.6417 x 10 ²) = (Gal)
		(Non-Preferred Conversions)		
		Litre (l)	(Gal) x 3.7854 = (l)	(l) x (2.6417 x 10 ⁻¹) = (Gal)
Work	Foot-Pound (ft-lb _f)	Joule (J)	(ft-lb _f) x (1.3558) = (J)	(J) x (7.3756 x 10 ⁻¹) = (ft-lb _f)



SELECTION OF HOSE & FITTINGS

Fluid compatibility

This chart indicates the fitting materials and inner tube compatibility for the fluid to be conveyed. It is intended for use as a guide only and is not a guarantee. Final selection of the proper hose style is further dependent on pressure, fluid and ambient temperature, concentration of agent, intermittent or continuous exposure.

NOTE : Rubber covered hose styles for use with gases above 250 psi must be perforated. Spiral hose constructions should not be perforated or used with gases above 250 psi.

Caution : These recommendations are intended as a guide only. Many factors such as concentration, fluid and ambient temperature, pressure, duration of exposure, etc. have a bearing on the suitability of any hose or end fitting material for a specific application.

Use the chart as follows :

1. Locate the fluid to be carried.
2. Select suitability of hose style and fitting material.
3. Located hose part number under 1, 2, 3, 4 or 5 in chart below.
4. Check hose specifications on respective catalogue pages.

Resistance Rating Key

E = EXCELLENT

G = GOOD

C = CONDITIONAL

U = UNSATISFACTORY

	Synthetic rubber 1	Synthetic rubber 2	Teflon® 3	CPE 4	Steel	Brass	Stainless Steel	Aluminium
Agent to be carried	HOSE				FITTING			
Acetate Solvents, Crude	C	U	E	U	U	U	E	G
Acetate Solvents, Pure	C	U	E	U	U	U	E	G
Acetate Acid, dilute (10%)	U	U	E	U	U	U	E	E
Acetic Acid, glacial	U	U	E	U	U	U	E	E
Acetic Acid, Vapours	U	U	U	U	U	U	U	U
Acetone	E	U	E	G	E	E	E	E
Acetylene	E	U	E	G	E	G	E	E
Air	E	E	E	E	E	E	E	E
Air(Hot)(to200°F)	E	C	E	G	E	E	E	E
Alcohols	E	E	E	E	C	E	E	G
Aluminium Chloride	U	U	U	U	U	U	U	U
Aluminium Fluoride 20%	U	U	U	U	U	U	U	U
Aluminium Sulphate	U	U	E	U	U	C	G	C
Alums	U	U	E	U	U	C	G	C
Ammonia Gas, Cold	U	U	U	U	E	U	E	E
Ammonia Gas, Hot	U	U	U	U	E	U	E	C
Ammonia, Liquid (Anhydrous)	U	U	U	U	E	U	E	E
Ammonia, Aqueous	U	U	U	U	E	U	E	E
Ammonium Chloride	E	E	E	E	G	C	G	U
Ammonium Hydroxide	E	G	G	C	G	U	G	E
Ammonium Nitrate	E	E	E	E	E	U	E	C
Ammonium Phosphate	U	U	E	U	U	U	G	C
Ammonium Sulphate	E	E	E	E	G	C	G	U
Amyl Acetate	G	U	E	U	C	E	E	E
Amyl Alcohol	E	E	E	E	G	G	G	C
Aniline, Aniline Oil	E	U	E	G	E	U	E	C
Aniline Dyes	U	U	G	U	U	C	E	C
Asphalt up to 180°F	U	G	E	E	E	G	E	C
Barium Chloride	E	E	E	E	G	G	G	C
Barium Hydroxide	E	E	G	E	G	U	E	U
Barium Sulphide	U	U	E	U	U	U	E	U
Beet Sugar Liquors	E	E	E	E	E	G	E	E
Benzene, Benzol	U	U	E	C	E	E	G	E
Black Sulphate Liquor	E	E	E	G	E	C	E	U
Blast Furnace Gas	U	U	E	E	E	C	E	U

	Synthetic rubber 1	Synthetic rubber 2	Teflon® 3	CPE 4	Steel	Brass	Stainless Steel	Aluminium
Agent to be carried	HOSE				FITTING			
Borax	E	E	E	E	U	G	G	U
Boric Acid	U	U	E	U	U	C	E	G
Brine	E	E	E	E	U	G	G	U
Bromine	U	U	U	U	U	C	U	U
Butyl Acetate	G	U	E	G	E	E	E	E
Butyl Alcohol, Butanol	E	E	E	E	E	G	E	E
Calcium Bisulphite	U	U	E	U	U	U	G	C
Calcium Chloride	E	E	E	E	G	G	G	C
Calcium Hydroxide	U	E	E	E	E	E	E	U
Calcium Hypochlorite	E	C	E	E	C	C	G	U
Caliche Liquors	E	E	E	E	E	E	E	E
Cane Sugar Liquors	E	E	E	E	E	G	E	E
Carbolic Acid Phenol	U	C	E	E	U	E	E	E
Carbon Dioxide	E	U	E	E	E	E	E	E
Carbon Disulphide	U	U	E	U	E	G	E	E
Carbon Monoxide (hot)	C	C	E	E	G	C	G	G
Carbon Tetrachloride	U	U	E	C	C	G	G	C
Carbonic Acid	U	U	E	U	U	U	E	G
Castor Oil	E	E	E	E	E	E	E	E
Cellosolve Acetate	U	U	E	U	U	U	E	G
China Wood Oil (Tung)	U	G	E	G	E	G	E	E
Chlorinated Solvents	U	U	E	C	E	E	G	U
Chlorine (Dry)	U	U	U	U	E	G	G	G
Chlorine (Wet)	U	U	U	U	U	U	E	U
Chloroacetic Acid	U	U	U	U	U	U	U	U
Chloroform	U	U	U	U	U	U	E	U
Chlorosulphonic Acid	U	U	E	U	C	U	E	U
Chromic Acid (30%)	U	U	E	U	U	U	U	C
Citric Acid 10%	U	U	E	U	U	C	G	G
Copper Chloride	U	U	U	U	U	U	U	U
Copper Sulphate	U	U	E	U	U	U	G	U
Cottonseed Oil	E	G	E	E	E	E	E	E
Creosote	U	E	E	E	E	C	E	E
Diesel Oil Light	U	G	E	E	E	E	E	E
DowthermAand E	U	U	E	U	G	U	E	E

	Synthetic rubber	Synthetic rubber	Teflon®	CPE	Steel	Brass	Stainless Steel	Aluminium
	1	2	3	4				
Agent to be carried	HOSE				FITTING			
Ethers	C	C	E	G	E	E	E	E
Ethyl Acetate	G	U	E	G	E	E	E	C
Ethyl Alcohol	E	E	E	E	E	E	E	G
Ethyl Cellulose	G	G	E	G	E	G	G	G
Ethyl Chloride	E	G	E	U	G	G	C	C
Ethylene Dichloride	U	U	E	U	U	E	U	U
Ethylene Glycol	E	E	E	E	E	G	E	E
Ferric Chloride	U	U	U	U	U	U	U	U
Ferric Sulphate	U	U	E	U	U	U	G	U
Ferrous Salt Solutions	U	U	U	U	U	U	U	U
Formaldehyde	E	G	E	E	G	G	E	G
Formic Acid	U	U	E	U	U	C	E	C
Freon12	E	C	C	C	E	G	E	G
Freon 13	E	C	C	C	E	G	E	G
Feon 22	E	C	C	C	E	G	E	G
Fuel Oil	E	G	E	E	E	E	E	E
Furfural	E	U	E	E	E	G	E	E
Gasoline	U	E	E	E	E	E	E	E
Glue	C	C	C	C	E	C	E	E
Glycerin, Glycerol	E	E	E	E	E	G	E	E
Grease Petro	U	E	E	E	E	E	E	E
Green Sulphate Liquor	U	U	E	U	U	E	E	U
Guinness (Draught)								
Heptane	U	E	E	E	E	E	E	E
Hexane	U	E	E	G	E	E	E	E
Hydraulic Fluids & Libricating Oils								
Straight Petroleum Base	U	E	E	E	E	E	E	E
Water & Petroleum Oil Emulsion (FR)	U	E	E	E	C	E	E	G
Water & Glycol Solution	E	E	E	E	E	G	E	G
Straight Phosphate-Ester (FR)	E	U	E	E	E	E	E	E
Phosphate-Ester Petroleum Oil \								
Blend (FR)	U	U	U	E	E	E	E	E
Ester Blend (MIL-L-007808)	U	G	E	E	E	E	E	E
Silicone Oils	E	E	E	E	E	E	E	E
Hydrobromic Acid	U	U	U	U	U	C	U	U
Hydrochloric Acid, cold	U	U	U	U	U	C	U	U
Hydrochloric Acid, hot	U	U	U	U	U	C	U	U
Hydrocyanic Acid	U	U	G	U	C	U	G	E
Hydrofluoric Acid, cold	U	U	U	U	U	C	U	U
Hydrofluoric Acid, hot	U	U	U	U	U	C	U	U
Hydrofluosilicic Acid	U	U	U	U	U	C	U	U
Hydrogen	C	C	C	C	C	C	C	C
Hydrogen Peroxide (dilute)	U	U	E	U	U	U	G	E
Hydrogen Peroxide (concentrated)	U	U	E	U	U	U	G	E
Hydrogen Sulphide	U	U	E	U	C	C	G	G
Kerozene	U	E	E	E	E	E	E	E
Lacquer	U	U	E	C	U	E	E	E
Lacquer Solvents	U	U	E	C	U	E	E	E
Lactuc Acid	U	U	E	U	U	C	G	U
Linseed Oil	E	E	E	E	E	E	E	E
Magnesium Chloride	E	E	E	E	G	C	C	U
Magnesium Hydroxide	E	G	E	E	G	G	G	U
Magnesium Sulphate	E	E	E	E	E	G	E	G
Mercuric Chloride	U	U	U	U	C	U	C	U
Mercury	E	E	E	E	E	U	E	U
Methyl Alcohol, Methanol	E	E	E	E	U	E	E	G
Methyl Chloride, cold	C	C	E	C	E	E	E	U
Methyl Ethyl Ketone	G	U	E	G	G	G	G	G
Methyl Isopropyl-Ketone	U	U	U	U	C	C	C	C
Mineral Oil	U	E	E	E	E	E	E	E
Naptha	U	G	E	E	E	G	G	E
Napthalene	U	U	E	G	E	G	G	G
Nickel Chloride	U	U	U	U	U	U	C	U
Nickel Sulphate	U	U	E	U	U	C	E	C

	Synthetic rubber	Synthetic rubber	Teflon®	CPE	Steel	Brass	Stainless Steel	Aluminium
	1	2	3	4				
Agent to be carried	HOSE				FITTING			
Nitric Acid, crude	U	U	E	U	U	U	G	U
Nitric Acid 10%	U	U	E	U	U	U	G	U
Nitric Acid 70%	U	U	E	U	U	U	G	U
Nitrobenzene	U	U	E	C	E	U	E	U
Oleic Acid	U	U	E	U	U	C	G	U
Oleum Spirits	U	G	E	E	E	E	E	E
Oxalic Acid	U	U	G	U	C	C	G	G
Oxygen	U	U	C	U	U	E	E	E
Paint	C	U	E	C	E	E	G	E
Palmitic Acid	G	E	E	E	E	C	E	G
Perchlorethylene	U	U	E	C	G	U	G	G
Petroleum Ether	U	E	E	E	E	E	E	E
Petroleum Naptha	U	E	E	E	E	E	E	E
Petroleum Oil (see Hydraulic Fluids)								
Phosphoric Acid (Commercial)	U	U	E	U	U	U	G	U
Pitric Acid, Molten	U	U	U	U	U	U	U	U
Picric Acid, Solution	U	U	E	U	C	U	G	C
Potasskum Chloride	E	E	E	E	E	C	E	U
Potassium Cyanide	E	E	E	E	E	U	G	U
Potassium Hydroxide	U	U	E	U	C	U	E	U
Potassium Sulphate	E	E	E	E	G	G	E	G
Perstone	E	E	E	E	E	G	E	E
Sewage	C	E	E	E	C	C	C	C
Soap Solution	E	E	E	E	E	E	E	U
Soda Ash, Sodium Carbonate	E	E	E	E	E	G	E	U
Sodium Bisulphate	U	U	E	U	U	C	C	U
Sodium Chloride	E	E	E	E	G	C	G	U
Sodium Cyanide	E	E	E	E	E	U	E	U
Sodium Hydroxide 50%	E	U	E	C	E	U	E	U
Sodium Hypochlorite	U	U	U	U	U	U	U	U
Sodium Nitrate	E	G	E	E	E	C	E	E
Sodium Perborate	U	U	E	U	C	C	E	U
Sodium Peroxide	U	U	E	U	C	C	G	E
Sodium Phosphates	U	U	E	U	U	C	G	E
Sodium Silicate	E	E	E	E	G	C	E	U
Sodium Sulphate	E	E	E	E	E	G	E	E
Sodium Sulphide	E	E	E	E	E	U	G	E
Sodium Triosulphate "Hypo"	E	E	E	E	C	U	G	G
Soybean Oil	E	E	E	E	E	E	E	E
Stannic Chloride	U	U	U	U	U	U	U	U
Steam up to 250°F	C	C	E	C	E	E	E	G
Stearic Acid	G	G	E	E	C	C	E	E
Sulphur	G	C	E	E	E	U	E	E
Sulphur Chloride	U	C	E	E	C	U	C	U
Sulphur Dioxide	C	C	E	U	G	C	G	C
Sulphur Trioxide	C	C	E	E	E	C	C	C
Sulphuric Acid-10% Cold	U	U	U	U	U	U	U	U
Sulphuric Acid-10% Hot	U	U	U	U	U	U	U	U
Sulphuric Acid-75% Cold	U	U	U	U	U	U	U	U
Sulphuric Acid-75% Hot	U	U	U	U	U	U	U	U
Sulphuric Acid-95% Cold	U	U	U	U	U	U	U	U
Sulphuric Acid-95% Hot	U	U	U	U	U	U	U	U
Sulphuric Acid-Fuming	U	U	E	U	G	U	G	G
Sulphurous Acid	U	U	E	U	C	U	G	G
Tannic Acid	C	C	E	U	U	C	E	C
Tar	U	C	E	E	E	G	E	E
Tartaric Acid	U	U	E	U	U	C	E	C
Toluene	U	U	E	C	E	E	E	E
Trichlorethylene	U	U	E	C	C	E	E	E
Turpentine	U	C	E	E	G	G	G	G
Varnish	U	U	E	C	E	G	E	E
Water	E	E	E	E	C	C	E	G
Xylene	U	C	E	C	E	E	G	E
Zinc Chloride	U	U	E	U	C	U	U	U
Zinc Sulphate	U	U	E	U	C	C	G	C



END FITTINGS STANDARDS

SHORT DESCRIPTION OF NUTS (JIC)

NAME	HEX	LENGTH	ID (APPX.)
7/16" - 20 Plain	14 MM	16 MM	9.5 MM
7/16" - 20 C.T.	19 MM	16 MM	9.5 MM
1/2" - 20 Plain	16 MM	17 MM	11.1 MM
1/2" - 20 C.T.	17 MM	17 MM	11.1 MM
9/16" - 16 Plain	18 MM	18.3 MM	12.5 MM
9/16" - 16 C.T.	22 MM	18.3 MM	12.5 MM
5/8" - 18	19 MM	18.3 MM	14.1 MM
1.1/16" - 16	22 MM	17 MM	15.4 MM
3/4" - 16 Plain	24 MM	21.5 MM	17 MM
3/4" - 16 C.T.	24 MM	21.5 MM	17 MM
13/16" - C.T.	24 MM	21.5 MM	18.6 MM
7/8" - 14 Plain	25.4 MM	25 MM	19.9 MM
7/8" - 14 C.T.	27 MM	25 MM	19.9 MM
1" - 16	32 MM	18 MM	23.4 MM
1.1/16" - 12 Plain	32 MM	26 MM	24.3 MM
1.1/16" - C.T.	32 MM	26 MM	24.3 MM
1.3/16" - 12 C.T.	36 MM	28 MM	27.5 MM
1.5/16" - 12 Plain	38 MM	28.5 MM	30.7 MM
1.5/16" - 12 Plain	41 MM	28.5 MM	30.7 MM
1.5/16" - 12 C.T.	41 MM	28.5 MM	30.7 MM
1.7/16" - 12 C.T.	41 MM	28 MM	34.5 MM
1.5/8" - 12	50 MM	31 MM	39.3 MM
1.7/8" - 12	56 MM	36 MM	45.6 MM
2.1/2" - 12	73 MM	41 MM	61.5 MM
3" - 12		45 MM	74.2 MM

* C.T. Crimp Type

B.S.P. NUTS

NAME	HEX	LENGTH	ID (APPX.)
1/4" B.S.P	19 MM	19.5 MM	11.5 MM
1/4" B.S.P	19 MM	16 MM	11.5 MM
1/4" B.S.P	19 MM	16 MM	11.5 MM
3/8" B.S.P	22 MM	14.5 MM	15 MM
3/8" B.S.P	22 MM	19 MM	15 MM
3/8" B.S.P	22 MM	19 MM	15 MM
1/2" B.S.P	27 MM	14.5 MM	18.6 MM
1/2" B.S.P	27 MM	21.5 MM	18.6 MM
1/2" B.S.P	27 MM	21 MM	18.6 MM
5/8" B.S.P	30 MM	23 MM	20.6 MM
5/8" B.S.P	30 MM	23 MM	20.6 MM
5/8" B.S.P	27 MM	17.5 MM	20.6 MM
5/8" B.S.P	28.5 MM	30 MM	20.6 MM
3/4" B.S.P	32 MM	26 MM	24.1 MM
3/4" B.S.P	32 MM	17.5 MM	24.1 MM
3/4" B.S.P	32 MM	23 MM	24.1 MM
3/4" B.S.P	36 MM	26 MM	24.1 MM
1" B.S.P	41 MM	28 MM	30.3 MM
1" B.S.P	38 MM	17.5 MM	30.3 MM
1" B.S.P	41 MM	28 MM	30.3 MM
1.1/4" B.S.P	50.8 MM	20 MM	39 MM
1.1/4" B.S.P	50.8 MM	28 MM	39 MM
1.1/4" B.S.P	50 MM	27 MM	39 MM
1.1/2" B.S.P	56 MM	22 MM	44.9 MM
1.1/2" B.S.P	56 MM	30.5 MM	44.9 MM
1.1/2" B.S.P	56 MM	30.5 MM	44.9 MM
2" B.S.P	70 MM	35 MM	56.7 MM

METRIC NUTS

NAME	HEX	LENGTH	ID (APPX.)
12 x 1.5	17 MM	15 MM	10.5 MM
14 x 1.5	19 MM	14.5 MM	12.5 MM
14 x 1.5	19 MM	20 MM	12.5 MM
16 x 1.5	21 MM	17 MM	14.5 MM
16 x 1.5	22 MM	21 MM	14.5 MM
18 x 1.5	24 MM	21 MM	16.5 MM
18 x 1.5	22 MM	17 MM	16.5 MM
20 x 1.5	24 MM	21 MM	18.5 MM
22 x 1.5	27 MM	20 MM	20.5 MM
22 x 1.5	27 MM	24 MM	20.5 MM
24 x 1.5	32 MM	26 MM	22.5 MM
24 x 1.5	30 MM	21 MM	22.5 MM
24 x 1.5	30 MM	21 MM	22.5 MM
26 x 1.5	32 MM	17.5 MM	24.5 MM
26 x 1.5	32 MM	21 MM	24.5 MM
27 x 1.5	36 MM	28 MM	25.5 MM
27 x 2	32 MM	26 MM	25 MM
30 x 1.5	36 MM	31 MM	28.5 MM
30 x 1.5	36 MM	21 MM	28.5 MM
30 x 1.5	36 MM	23 MM	28.5 MM
30 x 2	36 MM	23 MM	28 MM
33 x 1.5	41 MM	36 MM	31.5 MM
33 x 1.5	41 MM	28 MM	31.5 MM
33 x 2	41 MM	30 MM	31 MM
36 x 2	46 MM	28 MM	34 MM
36 x 1.5	46 MM	28 MM	34.5 MM
36 x 1.5	46 MM	36 MM	34.5 MM
38 x 1.5	46 MM	20.5 MM	36.5 MM
45 x 1.5	56 MM	22 MM	43.5 MM
45 x 2	56 MM	30.5 MM	43 MM
48 x 2	56 MM	30.5 MM	46 MM
42 x 2	50 MM	29.5 MM	40 MM
42 x 1.5	50 MM	43 MM	40.5 MM
52 x 1.5	60 MM	22 MM	50.5 MM
52 x 2	60 MM	30 MM	50 MM
65 x 2	75 MM	25 MM	63 MM
76 x 2			74 MM
78 x 2		25 MM	76 MM

In case of nut the inner dia must be carefully noted and thread gauge must be used to identify the nut. As for example, if you take 1.1/16" – 12 Nut, 3/4" - B.S.P. nut and 26 x 1.5 nut in the same design it will be difficult to identify the nut without thread gauge all are made from 32 mm Hex, and ID is near about same but thread per inch will differ with each other.

CAUTION

Following points are to be checked before assembly :

- Length of the nut and thread length of nut from nut head to inside tube head collared open thread must be checked carefully, otherwise fitment problem may be arise.

- B. Front Side neck bore of the socket along with undercut dia of the insert where it will be gripped must be matched with the crimp pressure, otherwise the end fitting may come out from the assembly or may be broken from that point.
- C. Reinforcement dia and socket inner dia (ID) must be checked with great care because if it does not follow norms then the assembly will have defect resulting into poor performance.
- D. Wall Thickness of the undercut position of endfittings must be checked as there is chance of breaking from that position.
- E. Orientation must be maintained exactly as per requirement other wise at the time of fitting the assembly will be twisted and will fail early.
- F. Length of the assembly must be maintained carefully. It may be hose length, tube to tube length, or end to end length. In case of short or excess length it can't be fitted in the equipment.
- G. Before cutting, a hose length must be checked carefully. In respect of socket to socket length tube to tube length, fitting end to fitting end length.
- H. Hose fitting are Zinc plated thickness of plating will be minimum 15 micron.


COMMON FITTINGS IN RESPECT OF HOSES

HOSE	U.N.F.	B.S.P.	METRIC
1/4"	7/16" - 20 1/2" - 20 9/16" - 18	1/4" - B.S.P. 3/8" - B.S.P.	14 X 1.5 16 X 1.5 18 X 1.5
5/16"	1/2" - 20 5/8" - 18 3/4" - 16	3/8" - B.S.P. 1/4" - B.S.P.	16 X 1.5 18 X 1.5
3/8"	9/16" - 18 3/4" - 16	3/8" - B.S.P. 1/2" - B.S.P.	18 X 1.5 20 X 1.5 22 X 1.5
1/2"	3/4" - 16 7/8" - 14 1.1/16" - 12 13/16" - 16	1/2" - B.S.P. 5/8" - B.S.P. 3/4" - B.S.P.	22 X 1.5 24 X 1.5 26 X 1.5
5/8"	1.1/16" - 12 1.5/16" - 12 1.3/16" - 12	5/8" - B.S.P. 3/4" - B.S.P.	24 X 1.5 26 X 1.5 27 X 2 30 X 1.5 30 X 2
3/4"	1.1/16" - 12 1.5/16" - 12 1.3/16" - 12	3/4" - B.S.P. 1" - B.S.P.	30 X 1.5 30 X 2 36 X 2 33 X 2 36 X 1.5
1"	1.5/16" - 12 1.7/16" - 12 1.5/16" - 12	1" - B.S.P. 1.1/4" - B.S.P.	33 X 1.5 36 X 1.5 42 X 2 45 X 1.5 38 X 1.5
1.1 X 4"	1.5/8" - 12 1.11/16" - 12 1.7/8" - 12	1.1/4" - B.S.P. 1.2/2" - B.S.P.	45 X 2 48 X 2 52 X 2

HOSE	U.N.F.	B.S.P.	METRIC
1.1 X 2"	1.7/8" - 12	1.1/2" - B.S.P. 2" - B.S.P.	42 X 1.5 52 X 1.5 52 X 2
2"	2.1/2" - 12	2" - B.S.P. 2.1/2" - B.S.P.	65 X 2 68 X 2

In case of U.N.F. fittings seating point of insert is generally found inside


74°/37°, 90°/45° or flat seat type.



In case of B.S.P. fittings it is generally found the seating point of the insert may be 60°/30° outside, spherical i.e. 6r radius and flat seat type.



In case of metric fittings the seating point of insert inside 60°/30° inverted for some Special machine, Ferul seat type and 'O' ring seat type tube angle will be 24° which in as per Garman Standard.

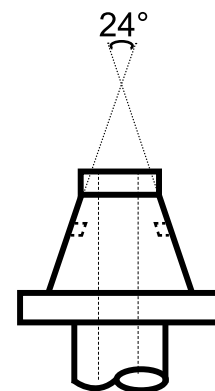

VERY IMPORTANT POINT


Before fitting every parts should be checked carefully.

As for example reinforcement dia i.e. wire od of the hose and ID of the socket along with under cut dia of the insert and front side bore of the socket must be checked carefully and it must be matched in each side. Difference between reinforcement dia and socket id must be checked as per manufacturer process, 0.5 mm difference between socket ID and reinforcement dia is allowed here. If crimp pressure is 2 mm over the socket then maximum difference between the socket front side bore and under cut dia of the insert will be 2 mm.


All assemblies must be tested at proof pressure with proper fluid and should be cleaned and then capped carefully before despatch.

CORRECT ASSEMBLY INSTALLATION

1. Under pressure, hose may change in length from -4% to +2% (or 4%). So always provide sufficient slack in hose to allow for shrinkage or expansion.

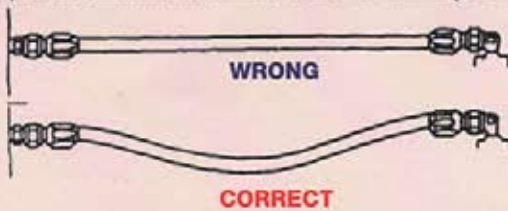


2. Do not use hose at bend radius less than the requirement min. bend radius. Provide sufficient length for a wide radius curve. To tight a bend pinches the hose and restricts the flow.



3. Do not install hose with a twist in it, because hose tends to be straightened under high operating pressure. This causes loosen of fitting out or even burst of hose at the point of strain




4. Where the radius falls below the required min. bend radius, an angle adapter must be used as below to avoid sharp bends in hose.

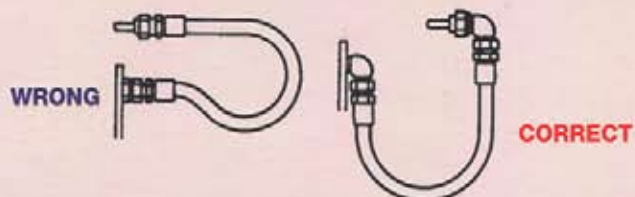


5. Hose must be bent in the same plane as the motion of the boss to which the hose is connected.



6. Obtain direct routing of hose through use of 45° and 90° adapters and fittings. Make appearance neater by avoiding excessive hose length.

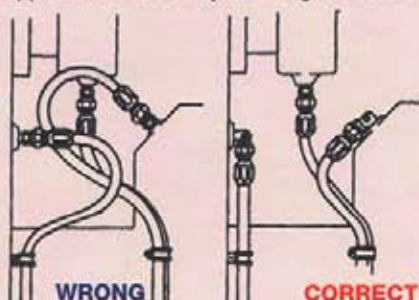

FITTINGS




Square Adaptors



Quick Release Coupling



Fittings



Male Fittings



Ferrule Sockets



Adaptors



Insert Tube



Female Fittings



Benjo Fittings



Split Flange Fittings



**MANUFACTURER
EXPORTER OF
HOSES &
HOSE ASSEMBLIES**



SONI RUBBER PRODUCTS LTD.

4, Princep Street, Kolkata - 700 072

Ph : 32930780, 22372691, 22377672, Fax : 91-33-2215-2925, 2221-5365

Email : marketing@soni.co.in, enquiry@sonigroup.com

Mumbai :
Tel. : 097304 38799
093314 33202
098920 27358
e-mail : mumbai@soni.co.in

Ahmedabad :
M : 9978404441
e-mail : ahmedabad@soni.co.in

Hyderabad :
M : 9030307878
e-mail : hyderabad@soni.co.in

AN ISO 9001 COMPANY

Website : www.sonigroup.com